

MDR 通用端子台



D1044-14



D1044-20



D1044-26



D1044-36



D1044



D1044-50

产品特点

- 把MDR连接器一对一引到端子台上，操作灵活，方便快速配线；
- 端子台默认为导轨安装方式，如需螺丝安装方式，请在型号后加-E，如D1044-E，左右中心距 = 端子台长度 + 7.7mm。



分类

总线模块

端子台

继电器模组

电缆线

传感器

规格参数

| | |
|------|------------------------------|
| 额定电流 | 1A |
| 额定电压 | DC24V |
| 适合电线 | 1.5mm ² /AWG16 以下 |


选型参考

| 型号 | 名称 |
|----------|----------------|
| D1044-14 | 14 位 MDR 通用端子台 |
| D1044-20 | 20 位 MDR 通用端子台 |
| D1044-26 | 26 位 MDR 通用端子台 |
| D1044-36 | 36 位 MDR 通用端子台 |
| D1044 | 50 位 MDR 通用端子台 |
| D1044-50 | 50 位 MDR 通用端子台 |


外形图

选型指南


D1044-14

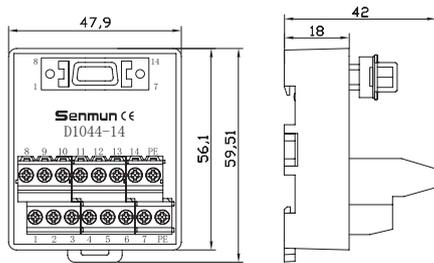


D1044-20

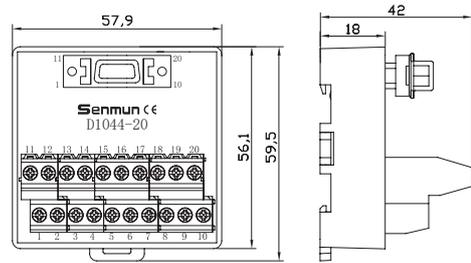

D1044-26

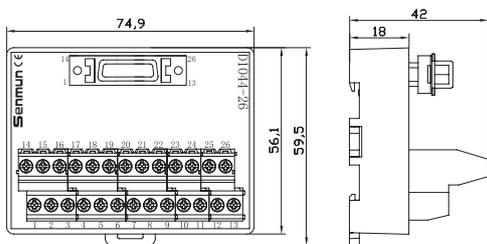


D1044-36

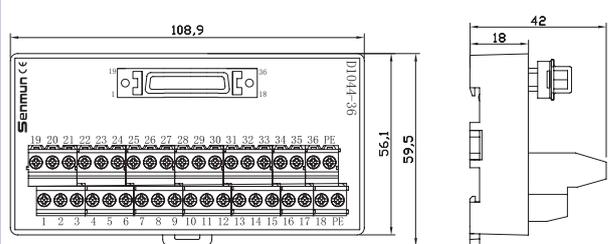


外形图

D1044

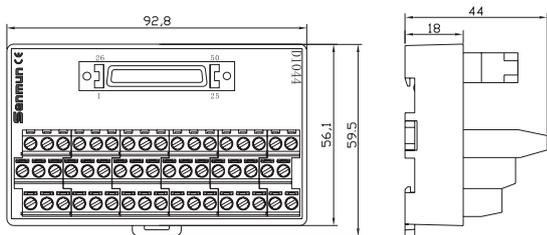


D1044-50

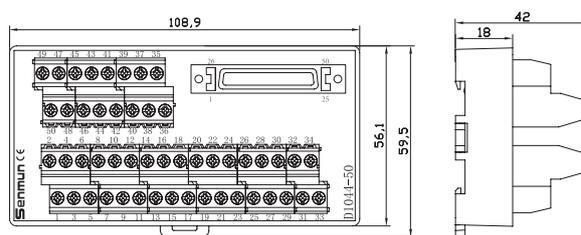


配线图


D1044-14

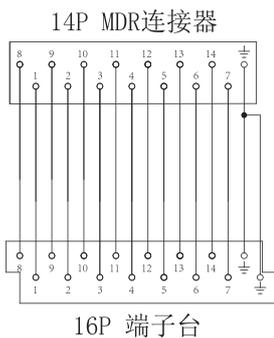


D1044-20

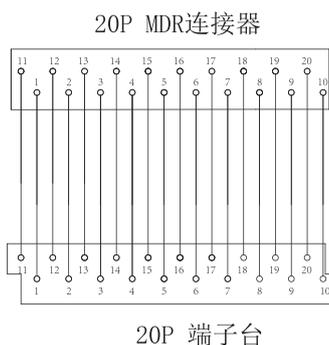


D1044-26

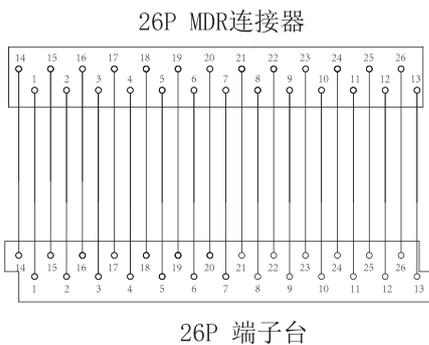

D1044-36

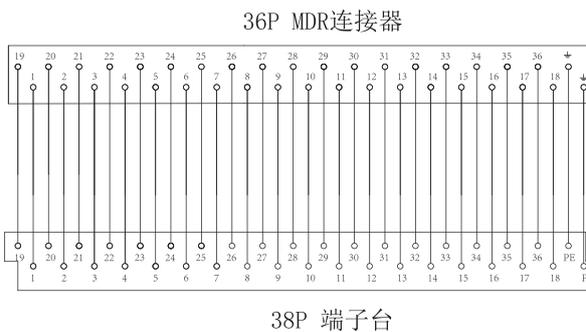

D1044/D1044-50

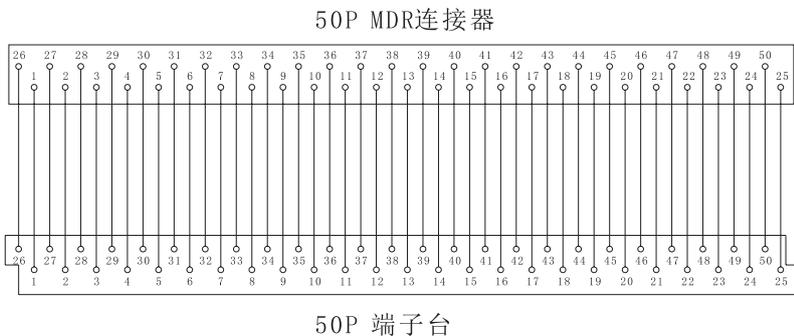

分类

总线模块

端子台

继电器模组

电缆线

传感器

选型指南