

# 台达 A2/B2 系列伺服电缆线



## 产品特点

- 电缆外护套由低粘性高耐磨损材料制成;
- 具有高抗弯曲强度及高柔韧性;
- 耐油和冷却剂, 耐刻痕;
- 适用于一般布线场所及拖链。



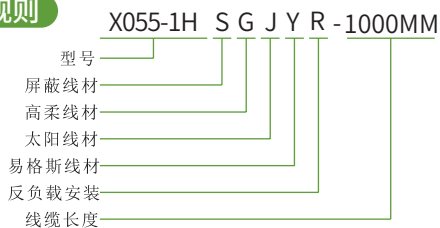
## 型号对应列表

| 三铭型号     | 对应台达型号           | 对应功率         | 线缆规格     |
|----------|------------------|--------------|----------|
| X055-21  | ASD-A2-PW00**    | 450W 以下      | AWG20    |
| X055-21H |                  | 450 ~ 750W   | AWG18    |
| X055-22  | ASD-B2-PW00**    | 450W 以下      | AWG20    |
| X055-22H |                  | 450 ~ 750W   | AWG18    |
| X055-23  | ASD-A2/A3-PW01** | 450W 以下      | AWG20+22 |
| X055-23H |                  | 450 ~ 750W   | AWG18+22 |
| X055-24  | ASD-B2-PW01**    | 450W 以下      | AWG20+22 |
| X055-24H |                  | 450 ~ 750W   | AWG18+22 |
| X055-25  | ASD-B2-EN00**    | 50 ~ 750W    | AWG24    |
| X055-26  | ASD-A2/A3-PW10** | 300 ~ 1000W  | AWG17    |
| X055-26H |                  | 1300 ~ 3000W | AWG13    |
| X055-27  | ASD-B2-PW10**    | 2000 ~ 3000W | AWG13    |
| X055-27H |                  | 3500 ~ 4500W | AWG10    |
| X055-28  | ASD-A2/A3-PW12** | 300 ~ 1000W  | AWG17+22 |
| X055-28H | ASD-A2/A3-PW13** | 2000 ~ 3000W | AWG13+17 |
| X055-29  | ASD-B2-PW12**    | 2000 ~ 3000W | AWG13+17 |
| X055-29H | ASD-B2-PW13**    | 3500 ~ 4500W | AWG10+17 |
| X055-30  | ASD-B2-EN10**    | 300 ~ 3500W  | AWG24    |

## 型号对应列表

|         |               |              |       |
|---------|---------------|--------------|-------|
| X055-31 | ASD-A2-EN00** | 50 ~ 750W    | AWG24 |
| X055-32 | ASD-A2-EN10** | 300 ~ 15000W | AWG24 |
| X055-33 | ACS3-CAPW11** | 50 ~ 750W    | AWG18 |
| X055-34 | ACS3-CAEN10** | 50 ~ 750W    | AWG24 |
| X055-35 | ACS3-CAEA10** | 50 ~ 750W    | AWG24 |
| X055-36 | ACS3-CAEN30** | 1500 ~ 3000W | AWG24 |
| X055-37 | ACS3-CAEA30** | 1500 ~ 3000W | AWG24 |

## 命名规则
















备注: 最短线长为 500MM, 如需增加以 500MM 为单位递增。  
编码器线长度超过 20 米 (含 20 米) 请联系业务员。  
编码器线默认为双绞屏蔽线, 无需加 S 或 T。

## 外形 / 电路图

| 型号       | 功能            | 外形图                                      | 电路图 |
|----------|---------------|------------------------------------------|-----|
| X055-21  | A2 动力线        |                                          |     |
| X055-21H |               | CN1: C4201H00-2*2PA<br>(插头针: C4201TOP-2) |     |
| X055-22  | B2 动力线        |                                          |     |
| X055-22H |               | CN1: C4201H00-2*2PA<br>(插头针: C4201TOP-2) |     |
| X055-23  | A2/A3 带刹车动力器线 |                                          |     |
| X055-23H |               | CN1: C4201H00-2*3PA<br>(插头针: C4201TOP-2) |     |
| X055-24  | B2 带刹车动力器线    |                                          |     |
| X055-24H |               | CN1: C4201H00-2*3PA<br>(插头针: C4201TOP-2) |     |
| X055-25  | B2 编码器线       |                                          |     |
| X055-26  | 动力线           |                                          |     |
| X055-26H |               | CN1: MS3108B20-18S                       |     |
| X055-27  | 动力线           |                                          |     |
| X055-27H |               | CN1: MS3108B24-11S                       |     |
| X055-28  | 带刹车动力器线       |                                          |     |
| X055-28H |               | CN1: MS3108B20-18S                       |     |

接上表

| 型号       | 功能         | 外形图                                                                                                                                                                 | 电路图                                                                                   |
|----------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| X055-29  | 带刹车动力器线    | <br>CN1: MS3108B24-11S                                                            |    |
| X055-29H |            |                                                                                                                                                                     |                                                                                       |
| X055-30  | B2 编码器线    | <br>CN1: MS3108B20-29S<br>CN2: Dsub 9P 公头                                         |    |
| X055-31  | A2 编码器线    | <br>CN1: 172161-9 (插头针: 170359-1)<br>CN2: 端子: 10120-3000PE<br>连接器: 10320-52A0-008 |    |
| X055-32  | A2 编码器线    | <br>CN1: MS3108B20-29S<br>CN2: 端子: 10120-3000PE<br>连接器: 10320-52A0-008            |    |
| X055-33  | A3 动力线     | <br>CN1: C4201H00-2*2PA (插头针: C4201TOP-2)                                         |    |
| X055-34  | A3 增量式编码器线 | <br>CN1: 172161-9 (插头针: 170359-1)<br>CN2: 55100-0670                              |    |
| X055-35  | A3 绝对值编码器线 | <br>CN1: 172161-9 (插头针: 170359-1)<br>CN2: 55100-0670                             |   |
| X055-36  | A3 增量式编码器线 | <br>CN1: MS3108B20-29S<br>CN2: 55100-0670                                       |  |
| X055-37  | A3 绝对值编码器线 | <br>CN1: MS3108B20-29S<br>CN2: 55100-0670                                       |  |