

# 汇川系列伺服电缆线



## 产品特点

- 电缆外套由低粘性高耐磨损材料制成;
- 具有高抗弯曲强度及高柔韧性;
- 耐油和冷却剂, 耐刻痕;
- 适用于一般布线场所及拖链。



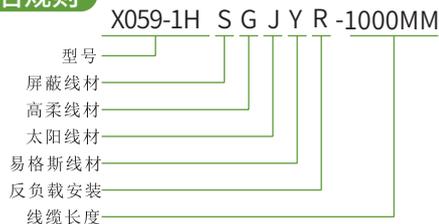
## 型号对应列表

三铭型号	对应汇川型号	对应功率	线缆规格
X059-1	S6-L-M00-1.0	100 ~ 750W	AWG20
X059-2	S6-L-B00-1.0	100 ~ 750W	AWG20+22
X059-3	S6-L-P00-1.0	100 ~ 750W	AWG24
X059-4	S6-L-M11-1.0	850 ~ 1500W	AWG17
X059-4H		1800 ~ 5000W	AWG13
X059-5	S6-L-P01-1.0	850 ~ 7500W	AWG24
X059-6	S6-L-M12-1.0	2900 ~ 4400W	AWG13
X059-7	S6-L-B11-1.0	850 ~ 1500W	AWG17+22
X059-8		1800 ~ 5000W	AWG13+17
X059-9	S6-L-M22-1.0	5500 ~ 7500W	AWG10
X059-10	S6-L-B12-1.0	2900 ~ 4400W	AWG13+17
X059-10H	S6-L-B022-1.0	5500 ~ 7500W	AWG10+17
X059-11	S6-L-M007-1.0	100-750W	AWG20
X059-12	S6-L-B007-1.0	100-750W	AWG20+22
X059-13	S6-L-P014-1.0	100-750W	AWG24
X059-14	S6-L-P024-1.0	100-750W	AWG24
X059-15	S6-L-P114-1.0	100-750W	AWG24

## 型号对应列表

三铭型号	对应汇川型号	对应功率	线缆规格
X059-16	S6-L-P124-1.0	100-750W	AWG24
X059-17	S6-L-P20-1.0	100-750W	AWG24
X059-18	S6-L-P21-1.0	850-7500W	AWG24
X059-19	S6-L-P111-1.0	850-7500W	AWG24
X059-20	S6-L-P121-1.0	850-7500W	AWG24

## 命名规则



备注: 最短线长为 500MM, 如需增加以 500MM 为单位递增。  
编码器线长度超过 20 米 (含 20 米) 请联系业务员。  
编码器线默认为双绞屏蔽线, 无需加 S 或 T。

## 外形 / 电路图

型号	功能	外形图	电路图
X059-1	动力线	 CN1: C4201H00-2*3PA (插头针: C4201TOP-2)	
X059-2	带刹车动力线	 CN1: C4201H00-2*3PA (插头针: C4201TOP-2)	
X059-3	编码器线	 CN1: 172161-1 (插头针: 770835-1)	
X059-4	动力线	 CN1: MS3108B20-18S	
X059-4H			
X059-5	编码器线	 CN1: MS3108B20-29S	
X059-6	动力线	 CN1: MS3108B20-22S	
X059-7	带刹车动力线	 CN1: MS3108B20-18S	
X059-8			

分类

总线模块

端子台









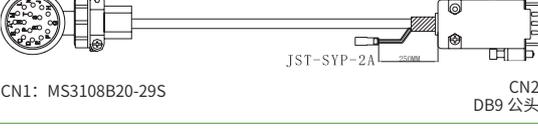

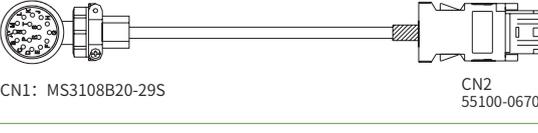

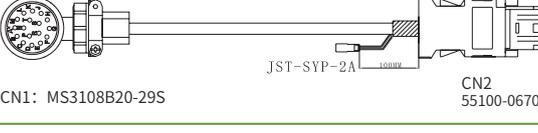

继电器模组

电缆线

传感器

选型指南

接上表

型号	功能	外形图	电路图
X059-9	动力线	 CN1: MS3108B20-22S CN2	
X059-10	带刹车动力线	 CN1: MS3108B20-22S CN2	
X059-10H			
X059-11	动力线	 CN1: S6-4+2P-H (插头针: S6-4+2P-T) CN2	
X059-12	带刹车动力线	 CN1: S6-4+2P-H (插头针: S6-4+2P-T) CN2	
X059-13	编码器线	 CN1: S6-7P-H (插头针: S6-7P-T) CN2 DB9 公头	
X059-14	编码器线	 CN1: S6-7P-H (插头针: S6-7P-T) JST-SYP-2A CN2 DB9 公头	
X059-15	编码器线	 CN1: S6-7P-H (插头针: S6-7P-T) CN2 55100-0670	
X059-16	编码器线	 CN1: S6-7P-H (插头针: S6-7P-T) JST-SYP-2A CN2 55100-0670	
X059-17	编码器线	 CN1: 172161-1 (插头针: 770835-1) JST-SYP-2A CN2 DB9 公头	
X059-18	编码器线	 CN1: MS3108B20-29S JST-SYP-2A CN2 DB9 公头	
X059-19	编码器线	 CN1: MS3108B20-29S CN2 55100-0670	
X059-20	编码器线	 CN1: MS3108B20-29S JST-SYP-2A CN2 55100-0670	

分类

总线模块

端子台

继电器模组

电缆线

传感器

选型指南