




16 位输入端子台




D1462/D1462-P




D1462-T



D1463/D1463-P



D1463-T



D1067/D1067-P

产品特点

- 此款产品对应各种终端输入信号连接使用，配有 16 组 3P 信号输入口，可接入 2 线制或 3 线制信号，采用动作 LED 显示，动作一目了然；
- D1462-T、D1463-T 双极性可切换，绿灯对应 NPN，红灯对应 PNP；
- D1462/D1462-P/D1462-T 使用 18P 端子台，可以和任何型号 PLC 配合使用。
- D1463/D1463-P/D1463-T/D1067/D1067-P 采用 20PMIL 插口引出，配合中转端子台 (D1042) 与 PLC 端连接；
- 端子台默认为导轨安装方式，如需螺丝安装方式，请在型号后加 -E，如 D1462-PE，左右中心距 = 端子台长度 + 7.7mm。




规格参数


额定电流	1A
额定电压	DC24V
适合电线	1.5mm ² /AWG16 以下

外形图


D1462/D1462-P

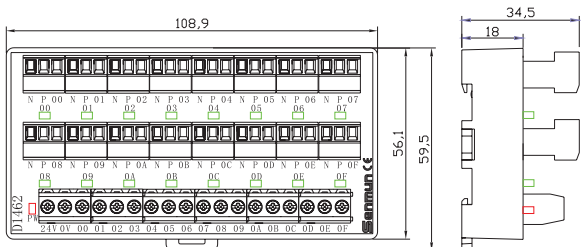


D1462-T

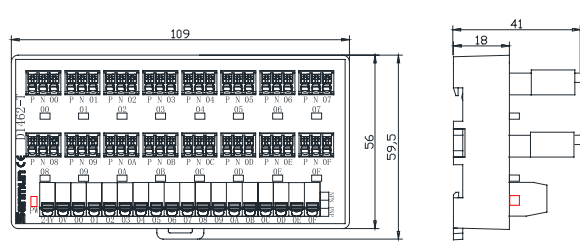


D1463/D1463-P

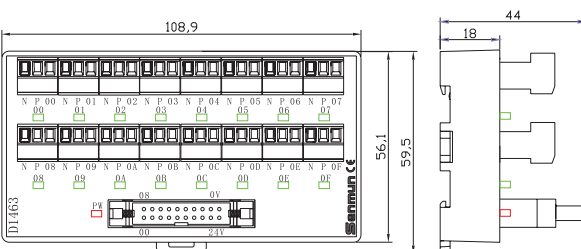

D1463-T

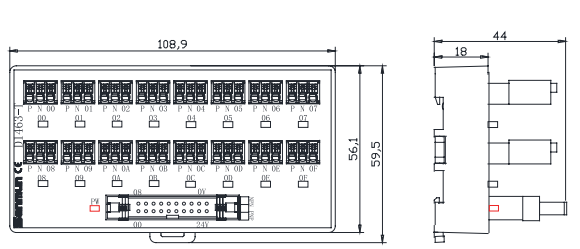


D1067/D1067-P

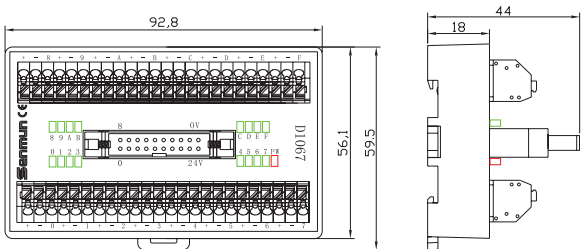


配线图


D1462

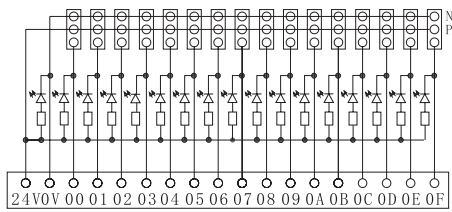


D1462-P

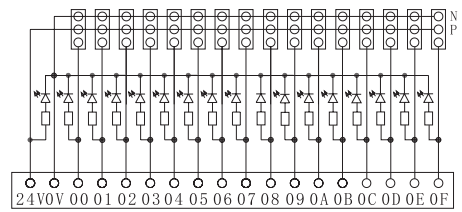


D1462-T

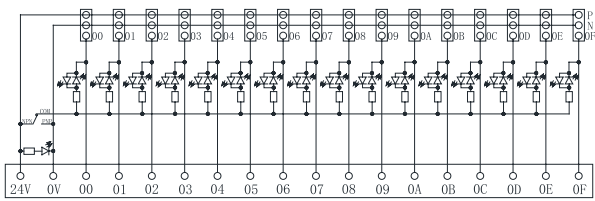


D1463

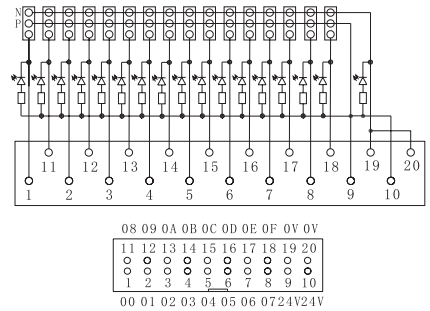


D1463-P

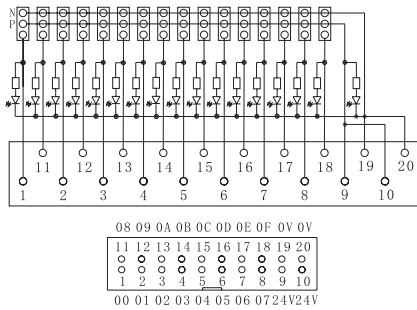

D1463-T

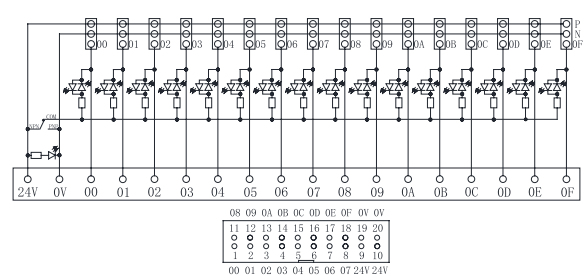

D1067

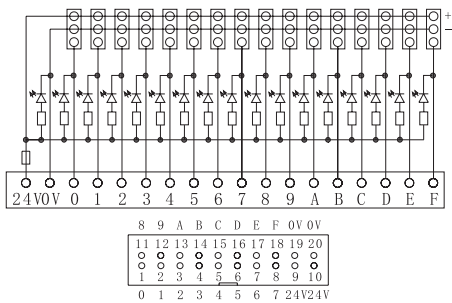

D1067-P

