

Dsub 公对公 一对一电缆线



产品特点

- ◎ 插头配外壳，有效保护线缆，美观。
- ◎ X012-2 为 DB15 两排转两排，X012-7 为 DB15 两排转三排。



分类

总线模块

端子台

继电器模组

电缆线

传感器


规格参数

线规	AWG28
导线构成	7/0.127
导体材料	镀锡铜
外表包裹层	PVC

选型指导

型号	对应端子台
X012-1	D1130F
X012-2/X012-7	D1131F
X012-3	D1132F
X012-4	D1133F
X012-5	D1134F
X012-6	D1135F

命名规则

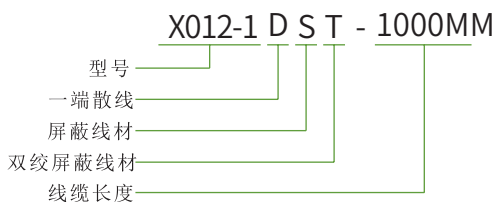

备注：最短线长为 500MM，如需增加以 500MM 为单位递增。

配线图

型号	孔位 - 导线颜色对应表	电路图	名称																																																																																																														
X012-1	<table><tr><td>孔位</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td></tr><tr><td>颜色</td><td>黑</td><td>棕</td><td>红</td><td>橙</td><td>黄</td><td>绿</td><td>蓝</td><td>紫</td><td>灰</td></tr></table>	孔位	1	2	3	4	5	6	7	8	9	颜色	黑	棕	红	橙	黄	绿	蓝	紫	灰	1 — 1 2 — 2 5 — 5 9 — 9	9P 公对公 通讯线																																																																																										
孔位	1	2	3	4	5	6	7	8	9																																																																																																								
颜色	黑	棕	红	橙	黄	绿	蓝	紫	灰																																																																																																								
X012-2 X012-7	<table><tr><td>孔位</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td></tr><tr><td>颜色</td><td>黑</td><td>棕</td><td>红</td><td>橙</td><td>黄</td><td>绿</td><td>蓝</td><td>紫</td><td>灰</td><td>白</td></tr><tr><td>孔位</td><td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>颜色</td><td>浅绿</td><td>浅蓝</td><td>粉红</td><td>白</td><td>黑</td><td>棕</td><td></td><td></td><td></td><td></td></tr></table>	孔位	1	2	3	4	5	6	7	8	9	10	颜色	黑	棕	红	橙	黄	绿	蓝	紫	灰	白	孔位	11	12	13	14	15						颜色	浅绿	浅蓝	粉红	白	黑	棕					1 — 1 2 — 2 5 — 5 15 — 15	15P 公对公 通讯线																																																																		
孔位	1	2	3	4	5	6	7	8	9	10																																																																																																							
颜色	黑	棕	红	橙	黄	绿	蓝	紫	灰	白																																																																																																							
孔位	11	12	13	14	15																																																																																																												
颜色	浅绿	浅蓝	粉红	白	黑	棕																																																																																																											
X012-3	<table><tr><td>孔位</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td></tr><tr><td>颜色</td><td>黑</td><td>棕</td><td>红</td><td>橙</td><td>黄</td><td>绿</td><td>蓝</td><td>紫</td><td>灰</td><td>白</td></tr><tr><td>孔位</td><td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td></tr><tr><td>颜色</td><td>浅绿</td><td>浅蓝</td><td>粉红</td><td>白</td><td>黑</td><td>棕</td><td>白</td><td>棕</td><td>白</td><td>黄</td></tr><tr><td>孔位</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>颜色</td><td>白</td><td>紫</td><td>白</td><td>灰</td><td>黄</td><td>黑</td><td>黄</td><td>棕</td><td>黄</td><td>红</td></tr></table>	孔位	1	2	3	4	5	6	7	8	9	10	颜色	黑	棕	红	橙	黄	绿	蓝	紫	灰	白	孔位	11	12	13	14	15	16	17	18	19	20	颜色	浅绿	浅蓝	粉红	白	黑	棕	白	棕	白	黄	孔位	21	22	23	24	25						颜色	白	紫	白	灰	黄	黑	黄	棕	黄	红	1 — 1 2 — 2 5 — 5 25 — 25	25P 公对公 通讯线																																												
孔位	1	2	3	4	5	6	7	8	9	10																																																																																																							
颜色	黑	棕	红	橙	黄	绿	蓝	紫	灰	白																																																																																																							
孔位	11	12	13	14	15	16	17	18	19	20																																																																																																							
颜色	浅绿	浅蓝	粉红	白	黑	棕	白	棕	白	黄																																																																																																							
孔位	21	22	23	24	25																																																																																																												
颜色	白	紫	白	灰	黄	黑	黄	棕	黄	红																																																																																																							
X012-4	<table><tr><td>孔位</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td></tr><tr><td>颜色</td><td>黑</td><td>棕</td><td>红</td><td>橙</td><td>黄</td><td>绿</td><td>蓝</td><td>紫</td><td>灰</td><td>白</td></tr><tr><td>孔位</td><td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td></tr><tr><td>颜色</td><td>浅绿</td><td>浅蓝</td><td>粉红</td><td>白</td><td>黑</td><td>棕</td><td>白</td><td>棕</td><td>白</td><td>黄</td></tr><tr><td>孔位</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td><td>27</td><td>28</td><td>29</td><td>30</td></tr><tr><td>颜色</td><td>白</td><td>紫</td><td>白</td><td>灰</td><td>黄</td><td>黑</td><td>黄</td><td>棕</td><td>黄</td><td>红</td></tr><tr><td>孔位</td><td>31</td><td>32</td><td>33</td><td>34</td><td>35</td><td>36</td><td>37</td><td></td><td></td><td></td></tr><tr><td>颜色</td><td>粉红</td><td>棕</td><td>红</td><td>棕</td><td>粉</td><td>红</td><td>棕</td><td>粉</td><td>红</td><td>棕</td></tr></table>	孔位	1	2	3	4	5	6	7	8	9	10	颜色	黑	棕	红	橙	黄	绿	蓝	紫	灰	白	孔位	11	12	13	14	15	16	17	18	19	20	颜色	浅绿	浅蓝	粉红	白	黑	棕	白	棕	白	黄	孔位	21	22	23	24	25	26	27	28	29	30	颜色	白	紫	白	灰	黄	黑	黄	棕	黄	红	孔位	31	32	33	34	35	36	37				颜色	粉红	棕	红	棕	粉	红	棕	粉	红	棕	1 — 1 2 — 2 5 — 5 37 — 37	37P 公对公 通讯线																						
孔位	1	2	3	4	5	6	7	8	9	10																																																																																																							
颜色	黑	棕	红	橙	黄	绿	蓝	紫	灰	白																																																																																																							
孔位	11	12	13	14	15	16	17	18	19	20																																																																																																							
颜色	浅绿	浅蓝	粉红	白	黑	棕	白	棕	白	黄																																																																																																							
孔位	21	22	23	24	25	26	27	28	29	30																																																																																																							
颜色	白	紫	白	灰	黄	黑	黄	棕	黄	红																																																																																																							
孔位	31	32	33	34	35	36	37																																																																																																										
颜色	粉红	棕	红	棕	粉	红	棕	粉	红	棕																																																																																																							
X012-5	<table><tr><td>孔位</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td></tr><tr><td>颜色</td><td>白注</td><td>黑</td><td>注</td><td>白注</td><td>黑</td><td>注</td><td>白注</td><td>黑</td><td>注</td><td>白注</td></tr><tr><td>孔位</td><td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td></tr><tr><td>颜色</td><td>白注</td><td>绿</td><td>注</td><td>白注</td><td>黑</td><td>注</td><td>白注</td><td>黑</td><td>注</td><td>白注</td></tr><tr><td>孔位</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td><td>27</td><td>28</td><td>29</td><td>30</td></tr><tr><td>颜色</td><td>黑注</td><td>红</td><td>注</td><td>黑</td><td>注</td><td>黑</td><td>注</td><td>黑</td><td>注</td><td>黑</td></tr><tr><td>孔位</td><td>31</td><td>32</td><td>33</td><td>34</td><td>35</td><td>36</td><td>37</td><td>38</td><td>39</td><td>40</td></tr><tr><td>颜色</td><td>黑注</td><td>紫</td><td>注</td><td>黑</td><td>注</td><td>灰</td><td>注</td><td>黑</td><td>注</td><td>黑</td></tr><tr><td>孔位</td><td>41</td><td>42</td><td>43</td><td>44</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>颜色</td><td>棕注</td><td>绿</td><td>注</td><td>棕</td><td>注</td><td>蓝</td><td>注</td><td>棕</td><td>注</td><td>棕</td></tr></table>	孔位	1	2	3	4	5	6	7	8	9	10	颜色	白注	黑	注	白注	黑	注	白注	黑	注	白注	孔位	11	12	13	14	15	16	17	18	19	20	颜色	白注	绿	注	白注	黑	注	白注	黑	注	白注	孔位	21	22	23	24	25	26	27	28	29	30	颜色	黑注	红	注	黑	注	黑	注	黑	注	黑	孔位	31	32	33	34	35	36	37	38	39	40	颜色	黑注	紫	注	黑	注	灰	注	黑	注	黑	孔位	41	42	43	44							颜色	棕注	绿	注	棕	注	蓝	注	棕	注	棕	1 — 1 2 — 2 5 — 5 44 — 44	44P 公对公 通讯线
孔位	1	2	3	4	5	6	7	8	9	10																																																																																																							
颜色	白注	黑	注	白注	黑	注	白注	黑	注	白注																																																																																																							
孔位	11	12	13	14	15	16	17	18	19	20																																																																																																							
颜色	白注	绿	注	白注	黑	注	白注	黑	注	白注																																																																																																							
孔位	21	22	23	24	25	26	27	28	29	30																																																																																																							
颜色	黑注	红	注	黑	注	黑	注	黑	注	黑																																																																																																							
孔位	31	32	33	34	35	36	37	38	39	40																																																																																																							
颜色	黑注	紫	注	黑	注	灰	注	黑	注	黑																																																																																																							
孔位	41	42	43	44																																																																																																													
颜色	棕注	绿	注	棕	注	蓝	注	棕	注	棕																																																																																																							
X012-6	<table><tr><td>孔位</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td><td>10</td></tr><tr><td>颜色</td><td>白注</td><td>黑</td><td>注</td><td>白注</td><td>黑</td><td>注</td><td>白注</td><td>黑</td><td>注</td><td>白注</td></tr><tr><td>孔位</td><td>11</td><td>12</td><td>13</td><td>14</td><td>15</td><td>16</td><td>17</td><td>18</td><td>19</td><td>20</td></tr><tr><td>颜色</td><td>白注</td><td>绿</td><td>注</td><td>白注</td><td>黑</td><td>注</td><td>白注</td><td>黑</td><td>注</td><td>白注</td></tr><tr><td>孔位</td><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td><td>26</td><td>27</td><td>28</td><td>29</td><td>30</td></tr><tr><td>颜色</td><td>黑注</td><td>红</td><td>注</td><td>黑</td><td>注</td><td>黑</td><td>注</td><td>黑</td><td>注</td><td>黑</td></tr><tr><td>孔位</td><td>31</td><td>32</td><td>33</td><td>34</td><td>35</td><td>36</td><td>37</td><td>38</td><td>39</td><td>40</td></tr><tr><td>颜色</td><td>黑注</td><td>紫</td><td>注</td><td>黑</td><td>注</td><td>灰</td><td>注</td><td>黑</td><td>注</td><td>黑</td></tr><tr><td>孔位</td><td>41</td><td>42</td><td>43</td><td>44</td><td>45</td><td>46</td><td>47</td><td>48</td><td>49</td><td>50</td></tr><tr><td>颜色</td><td>棕注</td><td>绿</td><td>注</td><td>棕</td><td>注</td><td>蓝</td><td>注</td><td>棕</td><td>注</td><td>棕</td></tr></table>	孔位	1	2	3	4	5	6	7	8	9	10	颜色	白注	黑	注	白注	黑	注	白注	黑	注	白注	孔位	11	12	13	14	15	16	17	18	19	20	颜色	白注	绿	注	白注	黑	注	白注	黑	注	白注	孔位	21	22	23	24	25	26	27	28	29	30	颜色	黑注	红	注	黑	注	黑	注	黑	注	黑	孔位	31	32	33	34	35	36	37	38	39	40	颜色	黑注	紫	注	黑	注	灰	注	黑	注	黑	孔位	41	42	43	44	45	46	47	48	49	50	颜色	棕注	绿	注	棕	注	蓝	注	棕	注	棕	1 — 1 2 — 2 5 — 5 50 — 50	50P 公对公 通讯线
孔位	1	2	3	4	5	6	7	8	9	10																																																																																																							
颜色	白注	黑	注	白注	黑	注	白注	黑	注	白注																																																																																																							
孔位	11	12	13	14	15	16	17	18	19	20																																																																																																							
颜色	白注	绿	注	白注	黑	注	白注	黑	注	白注																																																																																																							
孔位	21	22	23	24	25	26	27	28	29	30																																																																																																							
颜色	黑注	红	注	黑	注	黑	注	黑	注	黑																																																																																																							
孔位	31	32	33	34	35	36	37	38	39	40																																																																																																							
颜色	黑注	紫	注	黑	注	灰	注	黑	注	黑																																																																																																							
孔位	41	42	43	44	45	46	47	48	49	50																																																																																																							
颜色	棕注	绿	注	棕	注	蓝	注	棕	注	棕																																																																																																							

备注：孔位-导线颜色对应表仅代表普柔28AWG，高柔线请咨询业务员。